



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H04B 10/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/49204</p> <p>(43) International Publication Date: 24 December 1997 (24.12.97)</p>
<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>(21) International Application Number: PCT/US97/11006</p> <p>(22) International Filing Date: 23 June 1997 (23.06.97)</p> <p>(30) Priority Data: 08/667,400 21 June 1996 (21.06.96) US</p> <p>(71) Applicant: TREX COMMUNICATIONS [US/US]; 10455 Pacific Center Court, San Diego, CA 92121 (US).</p> <p>(72) Inventors: CHAN, Victor; 12495 Pathos Lane, San Diego, CA 92129 (US). RIVERS, Michael; 8728 Wahl Street, Santee, CA 92071 (US). MENDERS, James, H.; 943 Oliver Avenue, San Diego, CA 92109 (US). BLOOM, Scott; 13060 Callcott Way, San Diego, CA 92130 (US).</p> <p>(74) Agent: LAND, John; Fish & Richardson P.C., Suite 1400, 4225 Executive Square, La Jolla, CA 92037 (US).</p> </div> <div style="width: 48%;"> <p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i> <i>With amended claims.</i></p> <p>Date of publication of the amended claims: 26 February 1998 (26.02.98)</p> </div> </div>		

(54) Title: LASER COMMUNICATION DEVICE

(57) Abstract

A portable laser communication transceiver for transmitting and receiving information imposed on laser beams. A communication signal is imposed on a laser beam having a divergence of between 1 degree and 4 degrees. The beam (27) is directed by an operator, sighting through a telescopic viewing device (26), at a distant transceiver which collects light in the laser beam and extracts the communication signal. In preferred embodiments, the transceivers are handheld and each comprises a microphone (22) and earphone (20) allowing operators to talk with each other. Digital information can also be transmitted from personal computers and other electronic information equipment at the location of each operator. In a preferred embodiment useful for military and surveying applications, a GPS, a compass, and a laser ranging system is provided. This enables the operator to sight through a binocular to a target and determine its position in longitude, latitude and elevation. Target position information can then be transmitted to a distant transceiver which in this case could be a base transceiver.

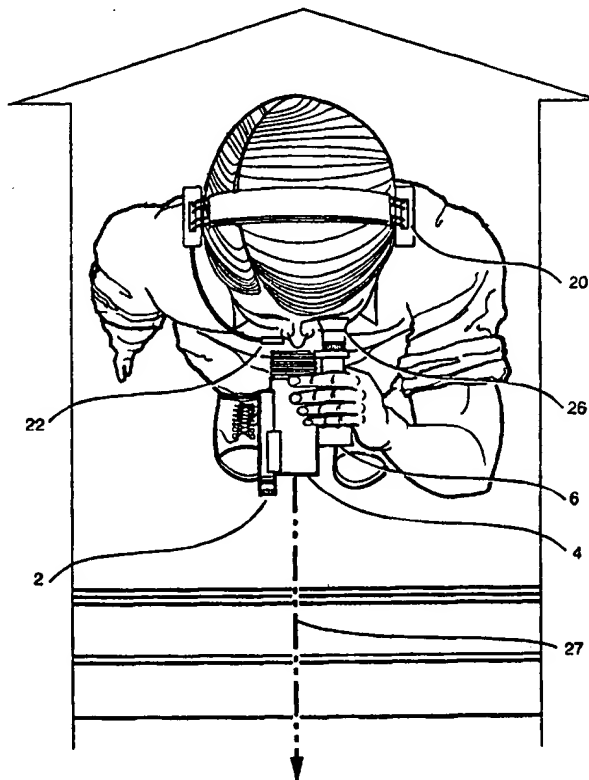

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

AMENDED CLAIMS

[received by the International Bureau on 31 December 1997 (31.12.97);
original claims 1-16 replaced by new claims 1-20 (6 pages)]

1. A laser communication transceiver for transmitting information via laser beams to another laser communication transceiver and for receiving information via laser beams from said another laser communication transceiver, said transceiver comprising:

A) a laser transmitter system comprising:

- 5 1) at least one laser operable to produce a signal laser beam of a selected range of wavelengths;
- 2) a signal modulator disposed relative to said laser and configured to modulate said signal laser beam to impose a digital communication signal on said signal laser beam;

10 B) a laser receiver disposed relative to said laser transmitter system and configured to receive a laser beam having a selected range of wavelengths from said another laser communication transceiver comprising:

- 1) an optical filter closely matched to at least one wavelength of said received laser beam;
- 15 2) a signal detector operable to receive and detect communication signals that are transmitted by said another laser communication transceiver through said optical filter;

20 C) a telescopic viewing device operable to locate said another similar laser communication transceiver and to facilitate pointing said transceiver in a direction of said another laser communication transceiver; and

D) a laser ranging unit, a GPS unit and an electronic compass.

25 2. A laser communication transceiver as in Claim 1 wherein said telescopic viewing device comprises a binocular.

3. A laser communication transceiver as in Claim 1 further comprising a tilt gage.

30 4. A laser communication transceiver as in Claim 1 further comprising a microphone and earphones.

5. A transceiver as in Claim 1 further comprising a video camera and an electronic view finder.

6. A transceiver as in Claim 1 further comprising a speaker.

7. A transceiver as in Claim 1 wherein said laser receiver comprises a photo diode, a preamplifier, a frequency to voltage converter and a data converter for detecting said communication signal and distinguishing said signal as sound or digital data suitable for input to a computer.

8. A laser communication transceiver for transmitting information via laser beams to another laser communication transceiver and for receiving information via laser beams from said another laser communication transceiver, said transceiver comprising:

A) a laser transmitter system comprising:

- 1) a Voight filter;
- 2) at least one laser disposed relative to said Voight filter and operable to produce a signal laser beam of a narrow band of wavelengths which is locked at or near 852.11 nm using said Voight filter;
- 3) a signal modulator disposed relative to said laser and configured to modulate said signal laser beam to impose a digital communication signal on said signal laser beam;

B) a laser receiver disposed relative to said laser transmitter system and configured to receive a laser beam having a selected range of wavelengths from said another laser communication transceiver comprising:

- 1) an optical filter closely matched to at least one wavelength of said received laser beam;
- 2) a signal detector operable to receive and detect communication signals that are transmitted by said another laser communication transceiver through said optical filter; and

C) a telescopic viewing device operable to locate said another similar laser communication transceiver and to facilitate pointing said transceiver in a direction of said another laser communication transceiver.

9. A laser communication transceiver as in Claim 8, wherein said narrow band of wavelengths is produced with a distributed Bragg reflector laser diode with feedback control.

10. A laser communication transceiver for transmitting information via laser beams to another laser communication transceiver and for receiving information via laser beams from said another laser communication transceiver, said transceiver comprising:

A) a laser transmitter system comprising:

1) at least one laser operable to produce a signal laser beam of a selected range of wavelengths;

2) a signal modulator disposed relative to said laser and configured to modulate said signal laser beam to impose a digital communication signal on said signal laser beam;

B) a laser receiver disposed relative to said laser transmitter system and configured to receive a laser beam having a selected range of wavelengths from said another laser communication transceiver comprising:

1) an atomic line filter configured to provide a noise equivalent bandwidth of less than 0.1 nm and to have a transmission band closely matched to at least one wavelength of said received laser beam;

2) a signal detector operable to receive and detect communication signals that are transmitted by said another laser communication transceiver through said atomic line filter; and

C) a telescopic viewing device operable to locate said another similar laser communication transceiver and to facilitate pointing said transceiver in a direction of said another laser communication transceiver.

11. A transceiver as in Claim 10 where said receiver atomic line filter is a Faraday filter.

12. A transceiver as in Claim 10, wherein said receiver atomic line filter is a Voight filter.

13. A laser communication device, comprising:
5 a transmitting module operable to produce a signal beam having at least one laser that produces said signal beam and a first atomic optical filter based on an atomic medium that is disposed relative to said laser to receive at least a portion of said signal beam, wherein said first atomic optical filter produces an optical feedback signal based on an atomic transition line of said atomic medium and said laser is locked to said atomic transition line; and
10 a receiving module disposed relative to said transmitting module and configured to have a second atomic optical filter based on said atomic medium wherein said second atomic optical filter is configured to receive light having a frequency at said atomic transition line and to block light at other frequencies.

14. A device as in claim 13, wherein said transmitting module further comprising a laser controller operable to control at least the frequency of said laser at said atomic transition line according to said optical feedback signal from said first optical filter.

15. A device as in claim 14, wherein said laser controller is operable to modulate the frequency of said laser relative to said atomic transition line of said first atomic optical filter according to a temporal modulation criterion to imprint communication data on said signal beam for transmission.

16. A device as in claim 13, wherein said first atomic optical filter is positioned in line with said laser so that said signal beam passes said first atomic optical filter.

17. A device as in claim 13, further comprising a beam-splitting element in the path of said signal beam to split said signal beam into a diagnostic signal beam and an output signal beam, wherein said first atomic optical filter is positioned not to intercept said signal beam and

said beam-splitting element directs said diagnostic signal beam to pass through said first atomic optical filter which generates said optical feedback signal.

18. A device as in claim 13, wherein said first and second atomic optical filters are
5 selected from Voight and Faraday filters.

19. A device as in claim 14, wherein said laser is a diode laser and further comprising
a partially reflecting element disposed relative to said diode laser and said first atomic optical
filter, said reflecting element operating to partially reflect said portion of said signal beam
10 received by said first atomic optical filter back to said diode laser so that the frequency of said
diode laser is locked at said atomic transition line.

20. A laser communication transceiver for transmitting information via laser beams
to another laser communication transceiver and for receiving information via laser beams from
15 said another laser communication transceiver, said transceiver comprising:

A) a laser transmitter system comprising:

- 1) a Faraday filter;
- 2) at least one laser disposed relative to said Faraday filter and operable to
20 produce a signal laser beam of a narrow band of wavelengths which is locked
at or near 852.11 nm using said Faraday filter;
- 3) a signal modulator disposed relative to said laser and configured to modulate
said signal laser beam to impose a digital communication signal on said signal
laser beam;

B) a laser receiver disposed relative to said laser transmitter system and configured
25 to receive a laser beam having a selected range of wavelengths from said another
laser communication transceiver comprising:

- 1) an optical filter closely matched to at least one wavelength of said received
laser beam,

- 2) a signal detector operable to receive and detect communication signals that are transmitted by said another laser communication transceiver through said optical filter; and
- 5 C) a telescopic viewing device operable to locate said another similar laser communication transceiver and to facilitate pointing said transceiver in a direction of said another laser communication transceiver.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.